

Panel-Loc™

Wall and Roof Panel





**CENTRAL
STATES**
MANUFACTURING, INC.

Looking for a strong, reliable low rib metal building panel from a strong, reliable company? Look no further than Panel-Loc™ from Central States Manufacturing. As owners of our company, each of us at Central States Manufacturing is passionate about helping your business grow by satisfying your needs. We work to deliver our high quality products to you accurately and on time, every time. So expect to be treated like our #1 priority, because you are.

Panel-Loc™ Features:

- Full hard, 26- and 29-gauge steel manufactured to ASTM A792 Grade 80 specifications for Galvalume and ASTM A653 for Galvanized. Minimum tensile strength of 80,000 PSI.
- UL790 for fire resistance and UL 2218/Class 4 impact resistance rating to withstand the most severe weather, including ice, driving wind, or heavy snow.
- Heavy, hot-dipped zinc-aluminum coating on all bare and painted products for maximum corrosion and edge protection, low maintenance and durability. Galvalume products have a 20-year substrate warranty.
- Acrylic coating on bare panel improves the performance and applicability of the unpainted Galvalume or Galvanized sheet. No oils are applied, making installation safer and easier.
- Purlin bearing rib provides stability during application.
- Available with a 40-year limited paint warranty. See Low Rib color chart for color availability.
- Employs our state-of-the-art siphon groove, a drain channel that guards against wind, rain, and snow; eliminating leaks.
- **CENTRAL GUARD** modified siliconized polyester paint system.
Powered by Valspar's WeatherX™ technology
- Wide fastening surface for easy application.
- Thrifty product line available.
- 36" panel coverage.

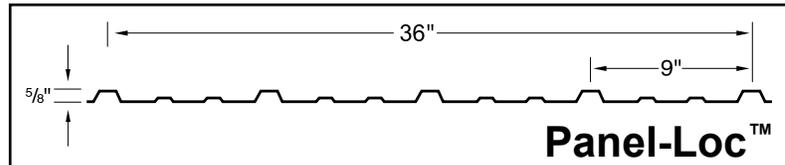

The siphon groove on the underlap of the panel interlocks with the overlap of the next panel, adding strength to the purlin bearing rib. This

design permits free-flow water runoff while channeling out any water that might be forced into the snug-fitting lap.

36" WIDE, CENTRAL STATES MFG PANEL-LOC			
Gauge	Thickness (inches)	Weight (psf)	Yield Stress (ksi)
26	0.0185	0.860	80.0
29	0.0150	0.698	80.0

Product Applications



See our Post Frame Product Guide for information on trims, gutters, accessories, load tables and warranties for this product.